

Narada

HRL/HRXL Series



INTRODUCTION


- AGM battery.
- Power coverage: 300-2700W.
- Premium design for high reliability and safety.
- Both top and front terminals are available.
- Design life at 25°C (77°F): 10+ years (12V); 12+ years (2V).
- Comply with IEC, IEEE, UL, EN, CE standards, etc.
- Applications: Telecommunication, Data center, UPS system.

TECHNICAL CHARACTERISTICS

- Extreme high rate discharge.
- Plate after tank formation process.
- Excellent discharging uniformity for battery in series.
- Special grid alloy to prolong service life.
- Patented sealing technology to avoid leakage.

GENERAL SPECIFICATION

Type	Nominal Voltage (V)	15 Rated Power (W,1.67V)	Dimension (mm)				Weight (kg)
			Length	Width	Height	Overall Height	
HRL750	2	750	183.0	101.0	360.0	370.0	16.1
HRL850	2	850	184.5	109.0	360.0	372.0	18.5
HRL1000	2	1000	184.5	123.0	360.0	370.0	19.7
HRL1100	2	1100	185.5	131.0	360.0	370.0	21.5
HRL1200	2	1200	184.5	144.5	360.0	370.0	23.7
HRL1300	2	1300	184.5	166.0	360.0	370.0	26.4
HRL1520	2	1520	184.5	178.5	360.0	370.0	30.2
HRL1750	2	1750	184.5	223.0	360.0	370.0	33.7
HRL2000	2	2000	184.5	223.0	360.0	370.0	37.9
HRL2500	2	2500	186.0	279.5	360.0	372.0	47.6
HRL2700	2	2700	190.5	338.5	360.0	372.0	56.4
12HRL300	12	300	261.0	173.0	206.0	206.0	24.8
12HRL400	12	400	341.0	173.0	215.0	215.0	34.0
12HRL550	12	550	341.0	173.0	278.0	278.0	45.0
12HRL600	12	600	550.0	125.0	283.0	283.0	52.0
12HRL630	12	630	550.0	125.0	283.0	283.0	53.0
12HRL700	12	700	558.0	125.0	316.0	316.0	60.0
12HRL845	12	845	522.0	239.5	222.5	222.5	69.0
12HRXL400	12	400	341.0	173.0	215.0	215.0	34.0
12HRXL550	12	550	341.0	173.0	278.0	278.0	45.0
12HRXL700	12	700	558.0	125.0	316.0	316.0	60.0

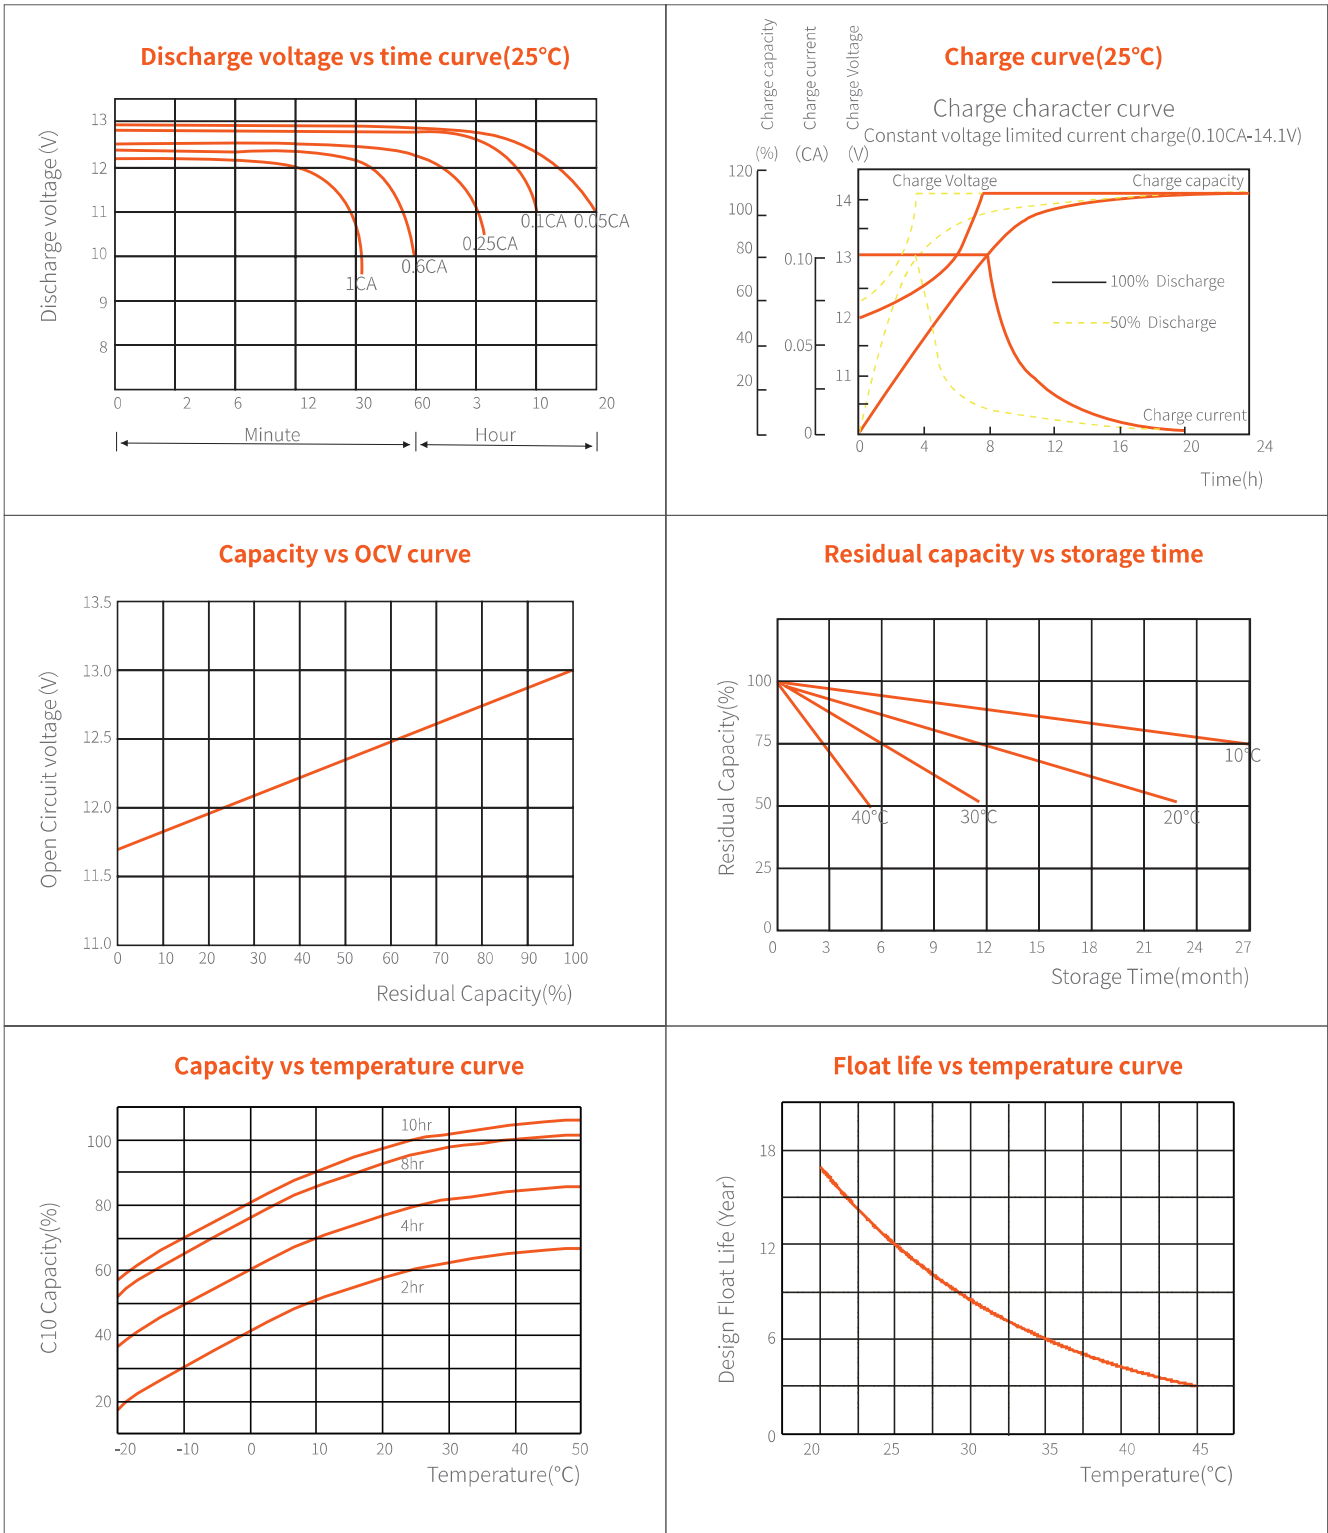

NARADA POWER SOURCE CO.,LTD.

Add: Building C, NO. 822 Wen' er West Road, Hangzhou, Zhejiang, China 310030
 Tel: (+86-571) 56975980
 Website: en.naradapower.com
 E-mail: intl@naradapower.com



NP-HRL-PD-EN-V1.0-202207
 Copyright Narada Power Source Co., Ltd. All rights reserved.
 Subject to revision without prior notice.